



### Features


- Surface Mount Crystal
- Ultra Miniature Resin Selaed
- Excellent Solderability

### General Specification

Frequency Range	16.000 ~ 50.000 MHZ
Frequency Tolerance @ 25 degC	± 50 ppm
Frequency Stability	± 50 ppm
Operating Temperature Range	-10°C tp +60°C
Equivalent Series Resistance	90 ohm
Load Capacitance	16 pF (standard)
Drive Level	100µW

\* Remarks : Please contact us for any further enquiry  
Specification are subjected to change without notice.

### Dimensions

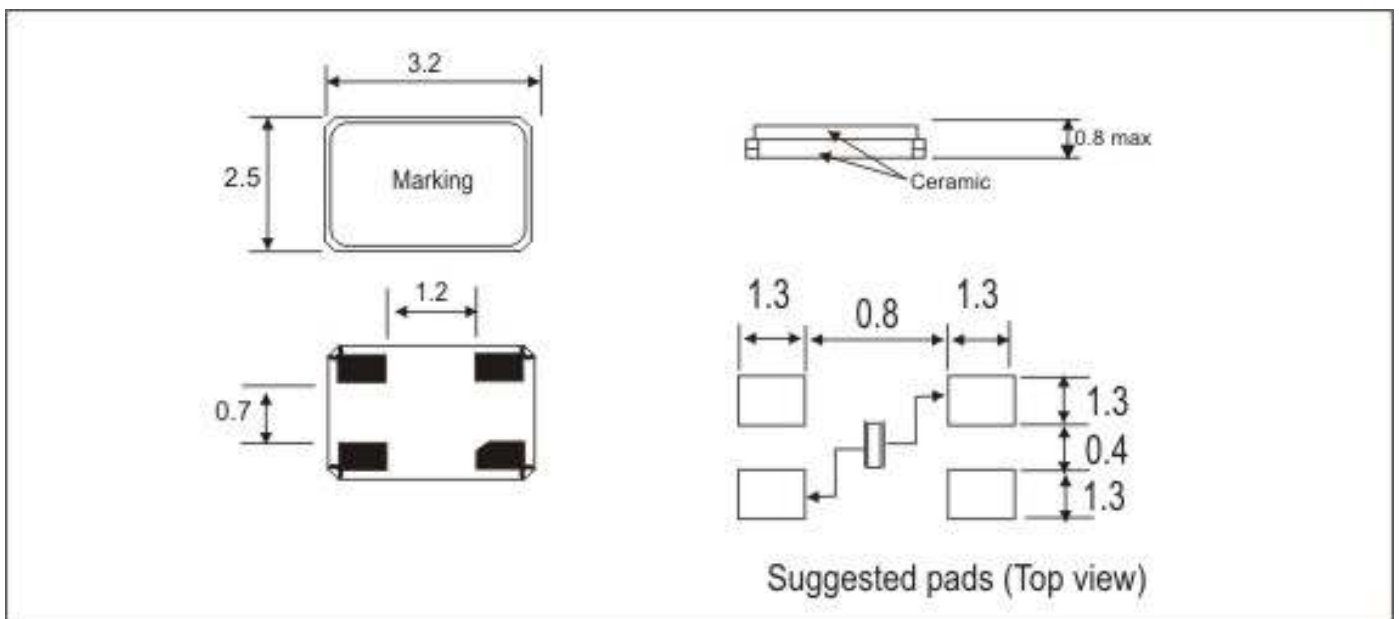

Great Microtama Electronics Ind. Berbek Industri III/21 Surabaya. Indonesia  
Fax. 62-31-8431305 Tel. 62-31-8431330 E-mail : greatind@greatmicro.com