



Features


- Surface Mount Crystal
- 1.3 mm thickness, Ultra Miniature Resin Sealed
- Excellent Solderability

General Specification

Frequency Range	10.000 ~ 67.000 MHZ
Frequency Tolerance @ 25 degC	± 50 ppm
Frequency Stability	± 50 ppm
Operating Temperature Range	-10°C tp +60°C
Equivalent Series Resistance	Please refer to table 1 below
Load Capacitance	16 pF (standard)
Drive Level	100µW

* Remarks : Please contact us for any further enquiry
Specification are subjected to change without notice.

Dimensions

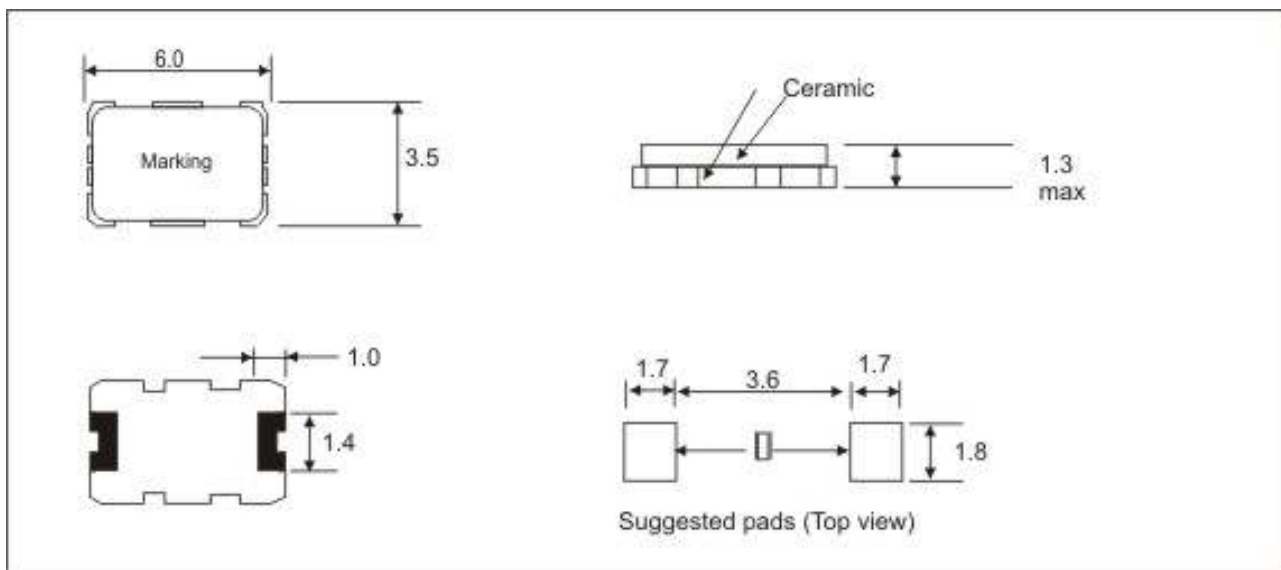

Great Microtama Electronics Ind. Berbek Industri III/21 Surabaya. Indonesia
Fax. 62-31-8431305 Tel. 62-31-8431330 E-mail : greatind@greatmicro.com